

↩ Reply all ▾ 🗑 Delete 🚫 Junk 🚫 Block ⋮

E5580 Stratfield Mortimer - Cemetery Footbridge Tree Survey & ground protection

JS

Julian Smith <jmsmith@sarumhardwood.co.uk>

👍 ↶ ↷ → ⋮

Thu 10/28/2021 5:27 PM

To: Michael Branch


Dear Mike ,

Sorry for the delay in providing this, but following receipt of Saplings tree protection requirements I would recommend that rather than use scaffold boards, the protection could be achieved using some form of proprietary matting in the form of **Euromats** .

We`ve used these in similar circumstances , noting that they can be laid directly on soft & uneven ground , linked together with steel "U" pins & available for hire from a number of suppliers such as "Grassform"as the following link .

<https://grassform.co.uk/buy/euromats/>

As discussed this afternoon , If we need to provide protection across the full area marked up in Blue & in- between at each end of the bridge then I believe that we should only need to cover a total area of 42m² , using 15/ 1.2m x 2.4m panels .

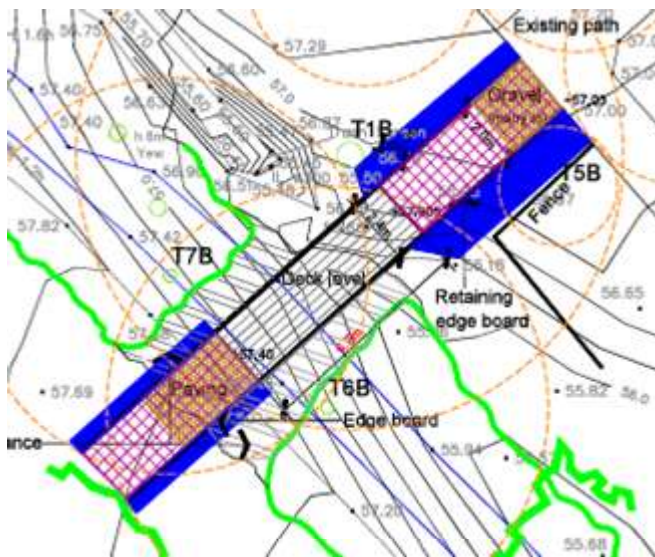

In this case , we would be happy to provide the protection at a cost of £875.00 + vat to include delivery, laying , recovery & the 1st weeks hire , with the mats delivered /laid in conjunction with our bridge which we would expect to complete within one week.

Additional hire periods beyond the 1st week would be at a rate of £150.00 + vat (£10.00 /week per panel)

As discussed this afternoon, we don`t see the need to lay the mats on Sand Blinding given the light traffic /intended use, but can provide this for an additional £765.00 + vat if needed , assuming it can be left in place & perhaps re-used by whoever is employed to provide the approach paving linking onto the bridge .